Montagu

MATERIAL INFORMATION

European full-grain leather with a light pigmented finish

PROPERTY	DETAIL
Material	European bull hides
Tannage / dye	Chrome tanned; aniline dyed-through
Average hide area	5.5 m² / 59 ft²
Thickness	1.4 mm ± 0.1 mm
Weight	840 gsm ± 10 g
Grain	Natural variations; full grain
Finish	Light pigmented; soft, waxy handle
Use guidance	Recommended for all upholstery applications

Reported test performance

TEST	METHOD	REPORTED RESULT
Tear resistance	UNI EN ISO 3377-1	>= 20
Light fastness	UNI EN ISO 105-B02	>= 6 / Blue Scale
Dry rub / 1,000 cycles	UNI EN ISO 11640	>= 4 / Grey Scale
Wet rub / 250 cycles	UNI EN ISO 11640	>= 4 / Grey Scale
Perspiration rub / 80 cycles	UNI EN ISO 11640	>= 4 / Grey Scale
Finish adhesion	UNI EN ISO 11644	>= 2 N/10 mm
Flex / 50,000 cycles	UNI EN ISO 5402	No cracks

Reported flammability

TEST	METHOD	REPORTED RESULT
Cigarette / match	UNI EN 1021-1 / 1021-2	Complies
Cigarette ignition	NFPA 260/UFAC	Complies
Marine upholstery	IMO Resolution A.652 (16)	Complies
California upholstery	TB 117 Section E	Complies
Port Authority	FS191 Method 5903	On demand

Values are transcribed from the supplied range data sheet; this information sheet is not a test certificate. Ask the studio for current reports and suitability for the proposed assembly.

Source lists REACH conformity, UNI 11239, ISO 14025, ISO 14067/CD2, RAL-UZ 148 and RAL-GZ 430.


Current colours, care guidance, fitting, lead time and quotations are confirmed directly with the studio.

Montagu

CUTTING INFORMATION

Approximate panel guide: 1,200-1,400 × 1,600-1,800 mm

Based on average hide sizes. Natural hide shapes and sizes vary; this is a guide to the largest approximate panel, not a guaranteed cutting yield.

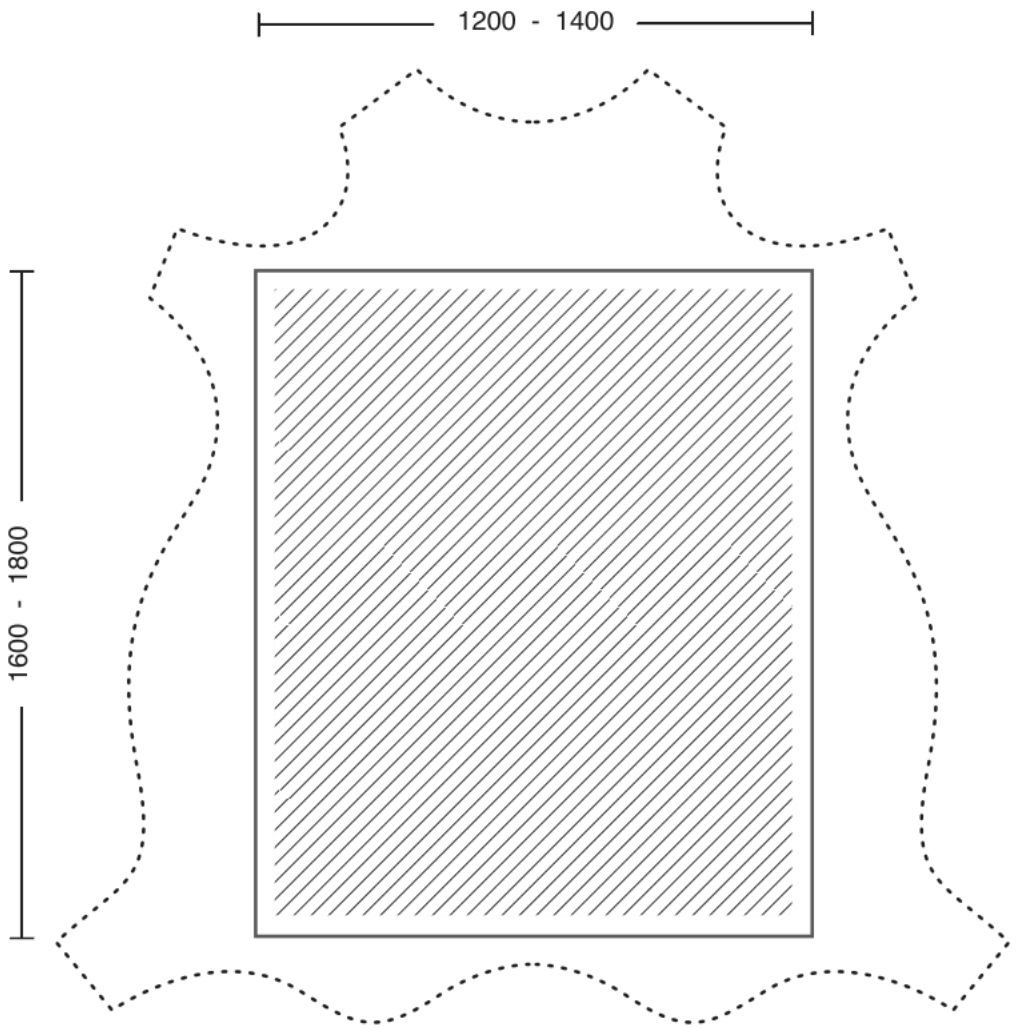

*All dimensions in millimetres.